Passed
19/6/48

E & PH (1948) Dept

Ms / Secret

55

G.O. No 1278 PH.

Dated 20.4.48.

Sub: GRANT - Panchayats - Private Medical Institutions, Honorary Medical Practitioners - Construction of a maternity ward at Kovilakam - Half grant of Rs 8250/- Sanctioned.

EsHG2

Telephonic Message No 7H283 G2/47-1DH
Dated 23-9-47

To
The PA to Hon SG
Madras

Sub:- Grant-in-aid - Medical - Private Medl Institutions - London Mission Hosp. Bellary - Construction of a Hosp. at Kowtalam - Increase of Grant

Ref:- GO No 1112 PH dated 2-4-47

Please say whether there are any proposals pending in your office for reconsideration of the orders mentioned above. GO, and if so when they will be submitted to Govt.

(illegible)

B. Section.

Office of the Surgeon-General with the Govt. of Madras, Madras 6 d/26-9-47.



Telephonic Message (By Post).

To

The Assistant Secretary to Government,
Education and Public Health Department, Madras.

77023

Ref:- Telephonic Message dated 24-9-47 - Building Grant - London Mission, Bellary - G.O. No. 1112 P.H. dated 2-4-47.

The Correspondent of the above Mission submitted a representation in his letter dated 8-9-47 reiterating his request for increasing the building grant sanctioned in G.O. No. Ms. 1264 P.H. dated 8-4-42 by 100% for reasons of increased cost of building materials, labour etc., remoteness of locality and difficulty in transport. In this connection a reference is solicited to Government Memo. No. 9726/46-1 D2 P.H. dated 1-3-46 and the management's explanation dated 26-4-46, copy already submitted to the Government. In their order No. 1112 P.H. dated 2-4-47, the Government have declined to comply with the

request

request of the management, in consultation with the Chief Engineer. In the circumstances, the Correspondent has been informed that no useful purpose will be served in putting up the matter again to the Government as they have already refused to comply with the request of the authorities.

2. In this connection, it is submitted that the grant sanctioned in G.O. No. Ms. 1264 P.H. dated 8-4-42 has been fully drawn by the management.

(G)

for Personal Assistant
to the Surgeon-General with the Govt.of Madras.

R.G.25-9.

Ref.No.14259-10 B/47. Office of the Surgeon-General with the Govt.of Madras, Madras 6, dated 29th September 1947.

From

Dr. S.L.Bhatia,CIE.,MC.,VHS.,MA.,MD(Cantab),FRCP(Lond), FRS(E),
Surgeon-General with the Govt.of Madras, Madras.

SECRETARIAT TO GOVERNMENT
30 SEP 1947
EDUCATION AND PUBLIC HEALTH DEPT.

To

The Secretary to Government,
Education and Public Health Department, Madras.

Sir,

Subject:- Grant- Building- Maternity Ward- Kavutalam- Bellary District- Request for payment of a half-grant.

---

p3 above — below —

9805 B

In continuation of this office telephonic message by post dated 26-9-1947, I enclose herewith a copy of letter dated 8-9-1947 received from the management of the London Mission, Bellary requesting for the payment of a half-grant towards the work cited above, since completed at an estimated cost of Rs.16,500/-. The authorities of the Mission interviewed the Surgeon-General (Major-General J.P.Huban) on 27-2-1947 in the office and requested for an assurance regarding payment of a half-grant from the Government. The Surgeon-General while agreeing with the need for a Maternity Ward, asked the authorities of the Mission to proceed with the arrangements for the construction of the ward and submit plans and estimates early for making his recommendation to the Government. It is now observed that the work has been completed at a cost of Rs.16,500/- and that a request for the payment of a half-grant of Rs.8,250/- is made. In the circumstances, the request for the payment of a half-grant of Rs.8,250/- is recommended. The proposal may be considered in connection with the Part II Schemes for 1948-49. The plans and estimates will be submitted on receipt from the Public Works Department authorities at an early date.

Your obedient servant,

29.9

for Surgeon-General with the Govt.of Madras

Copy of letter dated 8-9-1947 from Rao Sahib E.D.Martin, B.A.,L.T.,(Retired Headmaster, Wardlaw High School,Bellary), Martin Road, Bellary, Correspondent in charge of Construction of the London Mission Hospital Buildings at Kavutalam, Adoni Taluk,Bellary District, to the Surgeon-General with the Government of Madras, Madras.

Subject:- Addition of an uptodate Maternity ward to the newly constructed Hospital Buildings at Kavutalam- Adoni Taluk, Bellary District.

A good maternity ward was found an urgent necessi for the New Hospital buildings as there is no provision nearby, for difficult cases from the surrounding villages

A rich friend in a near village, promised some help and I approached Major-General J.P.Huban, with a pl of the Maternity ward in our Mission Hospital at Chikka llapur. He quite agreed with the great need and said I prepared to give half Government grant, provided it wa built according to the latest plan, which he gave. We prepared plans and estimates as he desired costing Rs and submitted them for approval and sanction.

3 I met him personally just before his retirement, he made one or two suggestions and approved the scheme and permitted me to start and go ahead with the building, in anticipation of the formal approval of the Government. He sent for the Chief Superintendent of his Office and told him in my presence, to expedite the formal order, as soon as the plans and estimates came back from the P.W.D. His personal clerk also knows this.

4 On strength of this, we again borrowed more money and started the work and completed the building in 4 months time. It is now ready for occupation. But I am sorry to say, the formal order has not yet come. Major General Huban left the country, the very next week.

5 So, I pray (a) the formal sanction may kindly be sent soon (b) the Executive Engineer, Bellary, may kindly be asked to valuate the building and issue his certificate to enable us to draw the Grant at an earliest date and pay off the loan, which we have incurred to construct this building.

6 Our requests have been set back, since Major-General Huban retired at a time, when he would have enabled us to complete the whole scheme, and draw all the Government Grants promised. We appeal to you to kindly come to our rescue and help us in this worthy cause.

Thanking in anticipation.

/True Copy/

29.9

for Surgeon-Gener[redacted] wi[redacted]h the Govt.of Madras.

27.9

mr 27/9

E 61+62

Very urgent

Memo:- 7h283 G2/47-264 dt 7.10.47

Sub:- Grant - Buildings - Maternity ward - Half grant to the Honour Mission Hospl. - Bellary

Ref from the SG's no. 14259-10B/47 D/29.9.47

Issue urgently
MH 7.10.47

The Correspondent of the Mission whose letter dated 8-9-47, enclosed with the letter read above, has stated that he approached the SG previous SG (Major General J.P. Auban) with ~~the plans of the M~~ plans & estimates for a maternity ward in the Mission Hospital at Chikkaballapur. The SG is requested to state whether the half grant of Rs 8,250/- has been asked for, is on the maternity ward for which a new Hospital at Chikkaballapur

or attached to the new Hospital buildings at Kovilakom.

2. The SA is also requested to obtain & submit to Govt at a very early date, the plans estimates for the maternity ward, as the scheme has to be treated as a Part II for LSG

[illegible] are A each as before (5.10.47) it may with be To forwarded to the SG Govt as a Part II Scheme forthwith. (R 15.10.47)

8.10.47

6.10.47

10.10.47

7/10/47

R.SURYANARAYANA RAO, B.A., M.L.C.

"MASCOT VILLE"
20, EDWARD ELLIOT ROAD,
MYLAPORE, P. O., MADRAS.

October 1, 1947.

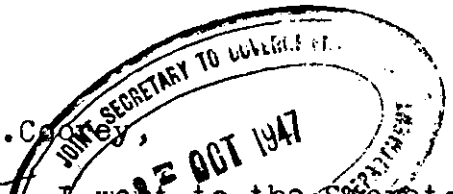

Dear Mr.Coorey,

I went to the Secretariat yesterday to see you in connection with the London Mission Hospital [illegible] Bellary district. You may remember I spoke to you about it with Mr.Martin some time ago. Mr.Martin met the Surgeon-General and requested him to visit the place to satisfy himself that the demands made are reasonable. Mr.Martin was hoping his request would be complied with. Instead Mr.Martin has received the enclosed reply from the Surgeon-General. Of course we are grateful for recommending half-grant for the maternity ward. But as regards increased grant for the buildings already sanctioned and erected in view of the increased cost of construction, the reply is very disappointing. It looks as though no purpose is served any more by approaching the Surgeon-General. A stage has reached when we should plead before Government. Will you be so good as to fix up a day and hour with the Hon'ble Minister to enable us to present our case? I am sure you too will be present on the occasion.

Thanking you,

Yours Sincerely,
R.Suryanarayana Rao
(R.Suryanarayana Rao.)

VP:

C O.
O.G.Coorey Esq., ICS.,
Joint Secretary to Government,
Public Health Department,
Fort St.George.

Medical Department.

From: The Surgeon-General,
Government of Madras, Madras 5.

To: Rao Sahib E.D.Martin, B.A.L.T.,
Retired Headmaster & Correspondent,
Wardhlaw High School,
Bellary.

Ref:- No.1425-9-8 B/47 dated 23-9-'47.

Sir,

Ref: Your interview with the Surgeon-General on 12-9-47 and your letter dated 8-9-47 regarding (1) Payment of a half-grant towards the Maternity Ward already constructed and (2) increase of 100% of the grant sanctioned in G.O.No.Ms. 1264 P.H. dated 8-4-1942.

.....

Your request for the payment of a half-grant towards the Maternity ward already constructed is being submitted to the Government for favourable consideration and their orders in the matter will be communicated to you in due course. The plan and estimate submitted by you on 12-9-47 are returned as they are identical with those already furnished by you.

As regards your request for increasing the half-grant of Rs.15,200/- already drawn, the Government in consultation with the Chief Engineer, have declined to comply with your request - vide G.O.No.1112 dated 2-4-47. As an increase in the grant has already been refused, the Surgeon-General considers that no useful purpose will be served in putting it up again to Government.

/TRUE COPY/

K.V. Thyagarajan Rao

Ref.No.14259-11 B/47. Office of the Surgeon-General with the Govt.of Madras, Madras 6, dated 10th October 1947.

From

Dr.S.L.Bhatia,CIE.,MC.,VHS.,MA.,MD(Cantab),FRCP(Lond), FRS(E),
Surgeon-General with the Govt.of Madras, Madras.

To

The Secretary to Government,
Education and Public Health Department,Madras.

Sir,

Reference:- Grant- Buildings- Maternity ward- Kavutalam- London Mission, Bellary- Government memorandum No. 74283 G2/47-2 P.H., dated 7-10-1947.

The Maternity ward for which a half-grant has been asked for is attached to the new hospital buildings at Kavutalam.

2. The plan and estimate since received from the Divisional Engineer, Bellary are enclosed herewith, together with a copy of his letter No.2515/47 dated 4-10-1947. In this connection, I also enclose a copy of letter No.3018-M dated 8-10-1947 from the Superintending Engineer, Anantapur Circle for the information of the Government.

Your obedient servant,

for Surgeon-General with the Govt.of Madras.

Copy of letter No.2515/47 dated 4-10-1947 from the Divisional Engineer(Highways), Bellary to the Surgeon-General with the Government of Madras, Madras.

Reference:- Your Ref.No. 14259-9 B/47 dated 23-9-1947.

I have seen the building during construction from the very

very beginning. The soil and sub-soils were checked by me. Gravelly soil is met with at 1'-6" below ground level and hence the foundations are taken down to 2'-6" below ground level as against 3'-0" provided in the plan. The Executive Engineer may be asked to evaluate the building. The plans and estimate are herewith returned.

Copy of letter No.3018-M dated 7-10-1947 from the Superintending Engineer, Anantapur Circle, Anantapur, to the Surgeon-General with the Government of Madras, Madras.

Reference:- Your No.14259-9-B/47 dated 23-9-1947.

As I have already pointed out to you in my letter No.2100 M/ 18-7-1947 the Divisional Engineer Highways, Bellary, possesses the required qualifications and is competant to scrutinise and furnish the certificates of completion prescribed in para 573 (iii) of the Civil Medical Code shown as appendix to G.O.1635 P.H., dated 10-7-1937. I need not offer any remarks regarding the structural stability of the buildings and regarding the reasonableness of the estimate.

It is moreover stated that the construction of the building has been completed already and I was not asked to inspect the building during its construction. The completion certificate may please be obtained from the Engineer who supervised the building during its construction. The Divisional Engineer Highways, Bellary is being requested to return the plans and estimates direct to you after necessary action.

/ True Copy/

for Surgeon-General with the Govt. of Madras.

mr 10/10

GENERAL SPECIFICATION TO ACCOMPANY THE ESTIMATE FOR CO
AN HOSPITAL BUILDING AT KOWTALAM. (Maternity &

NDATIONS:- The foundations shall be taken down to a depth of 3'-0 ground level of which the ~~broken~~ bottom one foot shall of concrete hard broken stone 1½" gauge in Lime mortar 1: with M.D.s.s.No.27, and the footing above, shall be coursed rubble in Lime mortar 1:2.
2nd sort, complying with M.Nss No.36 K. according to the depth and thickness shown in the plan.

BASEMENT: The basement walls shall be of 2'-6" high and of coursed rubble in lime mortar 1:2. 2nd sort complying with M.D.s.s. No.36 k.

Superstructure:- The walls in superstructure shall be of coursed rubble in lime mortar 1:2, 2nd sort complying with M.D.s.s.No.36k.

CUT STONE WORK:- The lintels over, doors, windows, and shelves, (almyrahs shall be of cut stone set in lime mortar 1:2 complying with M.D.S.S. No.36 K.

WOOD WORK:- All joists and beams in rooms, shall be of country wood, (Nallamaddi) wrought and put up complying with M.N.S.S.80.

DOORS,WINDOWS & ALMYRAHS:- The doors, windows and almyrahs, shall be of well seasoned teak wood. The sizes and description noted in the plan shall be fixed in position complying with M.D.S.S. No.82.

FLOORING:- The flooring in all rooms and passage, shall be of cuddapah slabs 2" thick over a bed of concrete broken stone 1½" gauge in lime mortar 1:2. 4" thick and pointed with cement mortar 1:3 complying with M.D.S.S.No.41 A. The sills of doors shall be provided with cuddapah slabs 2" thick and pointed with cement mortar 1:3 complying with M.D.S.S.No.41.

ROOFING: The roof over all rooms and passage shall be of cuddapah sla 1½" thick with 2" lime concrete, two courses of flat tiles set in mortar and white washed 2 coats.

PAINTING:- All wood work including doors and windows, shall be painted with choclate paint 2 coats over a primary coat, complyi with M.N.S.S. No.72.

FINISHING:- All interior walls shall be plastered with lime mortar 2 and white washed 2 coats complying with M.D.S.S. Nos. 58 The exterior walls including basement shall be pointed wi cement mortar 1:3. complying with M.D.S.S. No.68.

Provision has also been made towards fluctuation in rates for materials and other unforeseen work.

CALCULATIONS:-

Taking one foot of wall in cross walls, where the maximum pressure gets i.e. between septic labour and sterlizing rooms -

load due to terrace	1-0 X 14 X 143lbs		- 2002 lbs.
-do-	to masonary in superstructure	1-6 X 12-0X 140	- 2520
-do-	-do- basement	1-0 X 2-0X 2-6X 140	700
-do-	-do- foundations	1-0X 2-0X2-0 X 140	560
-do-	~~xxxx~~ concrete	1-0 X 3-0 X 1-0 X 120	360
		Total:-	6142

The pressure actg. on area of 3 sq ft 6142
therefore 1 sq foot - - 2047 or 0.9 tons per sq foot.

The safe permissible load for sandy ground or kankar varies from 2 to 3 tons per sq foot. The building is safe.

Joists:- clear span 8-6 effective 9'-0
joists at 1-6 c to c

Load due to terrace	9-0 X 1-6 X 140	1890
-do- of joists	9-0 X 2" X 6" X 53	40
		1930

Taking ends partly fixed the section required is 2½" X 6" and the same adopted.

Joists in passage:- clear span-6-0 effective 6-6 joists 1-6 c/c.

Weight due to terrace	6-6 X 1-6 X 140	1365
-do- of joists	6-6 X 2" X 6" X 53	29
	Total load	1394

Taking ends partly fixed --- the size required is 2" X 5"

Beam :- clear span - 12-0 effective - 13'-0

Weight due to terrace -	13'-0 X 6-6 X 140	11830
-do- beam	13-0 X 8" X 12" X53	459
	Total	12289

Taking ends supported

The size of beam required is 8" X 12" which will have a safe load of $\frac{150 \times 8 \times 12 \times 12 \times 12}{12 \times 12}$

equals 14400 lbs.

H K Bajoria 20/2/1947.
Divisional Engineer Highways
Bilaspur.

Data sheet to accompany the Revised Estimate for Constructing building for Hospital at Kavutalam, Adoni Tq. Bellary Distt.

ESTIMATE FORM—Abstract.

Item number. (1)	Quantity. (2)	Description of work (3)	Rate. (4)	Per (5)	Amount. (6)	Total. (7)
			Rs.		Rs.	Rs.
		Earth work Excavating foundations in gravelling soil				
		Rate as per S.I. No. 15 A			6-2-0	
		Add 125 %			7-10-6	
				Total	13-12-6	13-13-0
		Concrete broken stone in lime mortar 1:2				
		Rate as per S.I. No. 31 C/F	12-12-0	100 C.ft	12-12-0	
100 C.ft		Conveyance of broken stone 5 M.C.T.	8-3-3	"	8-3-3	
40 C.ft		-do- Sand 1 M.C.T	1-12-0	"	0-11-2	
20 C.ft		-do- lime 10 miles Road	2-5-0		1-7-5	
		Add 125 % on labour & materials 12-12-0			15-15-0	
		Add 100 % on Cartage			10-5-10	
				Total	49-6-8	49-7-0
		Coursed Rubble in lime Mortar 1:2				
		Rate as per S.I. No. 68			18-1-0	
110 C.ft		Conveyance of Stone as above	8-3-3	100 C.ft	9-0-5	
32 C.ft		-do- Sand as above	1-12-0	.	0-9-0	
16 C.ft		-do- Lime as above	2-5-0	.	1-2-9	
		Add 125% on labour & materials 18-1-0			22-9-3	
		Add 100% on Cartage			10-12-2	
				Total	62-2-7	62-3-0
		Kutch stone in lime mortar 1:2 1st Sort				
		Rate as per S.I. No. 60			69-15-0	
105 C.ft		Conveyance of Kutch stone Stato 7 miles road	14-3-6	100 C.ft	14-14-1	
16 C.ft		-do- Sand as above	1-12-0	"	0-4-6	
8 C.ft		-do- lime as above	2-5-0	.	0-9-4	
		Add 125% on 69-15-0			87-6-9	
		Add 100% on Cartage			15-2-9	
				Total	188-15-3	188-15-0
		Country wood Wrought & put up C.ft				allowed for estimate purposes only
		Cost of Teak and addl:	7-0-0	C.ft	7-0-0	
		Labour charges as per S.I. No. 181			0-10-0	
		Add 125% on Labour			0-12-6	
		Add Conveyance of wood to Site	L.S		0-1-6	
				Total	8-8-0	8-8-0

ESTIMATE FORM—Abstract.

Item number. (1)	Quantity. (2)	Description of work (3)	Rate. (4)	Per (5)	Amount. (6)	Total. (7)
			Rs.		Rs.	Rs.
6		Teak wood doors 4'x6'-6" panelled.				
	3.97 c.ft	Teak wood - - -	12-8-0	c.ft	49-10-0	allowed for estimate purposes
		Sundries including hold fasts labour etc. S.I. no. 187	3-12-6+8-15-0		12-11-6	
		Add 125% on labour & Sundries 12-11-6			15-14-5	
		Conveyance to site	-	-	2-0-0	
					80-3-11	80-4-0
7		Teak wood doors 3'x6'-6" Panelled				
	2.93 c.ft	Teak wood - - -	12-8-0	c.ft	36-10-0	
		Sundries including hold fasts, wind appliances			3-12-1	
	19.5 sq.ft	Labour charges as per S.I. no. 187	0-5-6	sq.ft	6-11-3	
		Add 125% on the above 10-7-4			13-1-2	
		Add conveyance charges	-	-	2-0-0	
				Total	62-2-6	62-3-0
8		Teak Wood doors 3'-6"x6'-6" panelled				
	3.64 c.ft	Teak wood - - -	12-8-0	c.ft	45-8-0	
		Sundries including hold fasts wind appliances etc including labour charges as per S.I. no. 187 - 3-12-1 + 7-13-2			11-9-3	
		Add 125% on the above	-		14-7-7	
		Add conveyance charges			2-0-0	
					73-8-10	73-9-0
9		Teak wood doors ledged, braced & planked including furniture complete 3'x6'-6"				
	3.28 c.ft	Teak wood	12-8-0	c.ft	42-4-0	
		Sundries including hold fasts etc labour charges & furniture as per S.I. no. 198			9-10-3	
		Add 125% on the above 9-10-3	-		12-0-10	
		Add conveyance	-		2-0-0	
				Total	65-15-1	65-15-0
10		Teak wood windows panelled 3'-6"x6'				
	2.71 c.ft	Teak wood	12-8-0	c.ft	33-14-0	
		Sundries including hold fasts & wind appliances as per S.I. no. 211			2-4-7	
	17.5 sq.ft	Labour charges	0-5-9	sq.ft	6-4-9	
		Add 125% on labour & Sundries 8-9-2	—		10-11-6	
		Add Conveyance	—	—	1-0-0	
					54-2-8	54-3-0

ESTIMATE FORM—Abstract.

Item number. (1)	Quantity. (2)	Description of work. (3)	Rate. (4)	Per (5)	Amount. (6)	Total. (7)
			Rs.		Rs.	Rs.
		Teak wood windows 1'-10½" x 4'-1½" Venetian				
1.27 Cft		Teak wood	12-8-0	C.ft	15-14-0	
		Sundries including hold fasts & wind appliances as per S.I. No. 207			2-8-1	
7.7 Sqft		Labour charges	0-8-6	Sq ft	4-1-5	
		Add for Conveyance			1-0-0	
		Add 125% on labour & Sundries 6-9-6			8-3-11	
				Total	31-11-5	31-11-0
		Teak wood Windows 2'-6" x 4' Panelled				
1.76 Cft		Teak wood	12-8-0	C.ft	22-0-0	
		Sundries including hold fasts & wind appliances as per S.I. No. 21			2-4-9	
10 Sqft		Labour charges	0-5-9	Sq ft	3-9-6	
		Add 125% on 5-14-3			7-5-10	
		Add for Conveyance			1-0-0	
				Total	36-4-1	36-4-0
		Teak Wood Windows 3'-0 x 4'-0 panelled				
1.96 Cft		Teak wood	12-8-0	C.ft	24-8-0	
		Sundries including hold fasts & wind appliances & labour charges as per S.I. No. 211			6-9-0	
		Add 125% on 6-9-0			8-3-3	
		Add for Conveyance			1-0-0	
				Total	40-4-3	40-4-0
		Ventilators glazed fixed double frame and with wire netting 3'-4" x 1'=9'				
0.49 Cft		Teak wood	12-8-0	C.f	6-2-0	
6 nos		Glass Panes 12" x 8"	1-0-0	each	6-0-0	
		Sundries including putting Brades etc as per S.I. No. 216	—	—	0-8-7	
5.9 Sqft		Labour charges	0-5-0	Sq ft	1-13-6	
		Add 125% on 2-6-1			2-15-7	
		Add for Conveyance	—	—	0-8-0	
				Total	17-15-8	or 18-0-0

ESTIMATE FORM—Abstract.

Item number. (1)	Quantity. (2)	Description of work (3)	Rate. (4)	Per (5)	Amount. (6)	Total. (7)
			Rs.		Rs.	Rs.
15		Terracing with Cuddapah Slabs 1½" thick bedded with Cement mortar 1:3 to full depth of slabs top and bottom 2" Concrete broken stone ¾" gauge in Cement mortar 1:3 reinforced with rabbit wire netting 6" mesh of not less than 14 S.W.G Wire or with expanded metal 3" short way mesh ⅛" × ½" Two courses of flat tiles set in Cement mortar 1:3 mixed with 10% Crude oil and white wash 2 coats top and bottom :-				
	105 sq ft	Cuddapah Slabs 1½" thick	6-0-0	100 Sq ft	6-4-10	
	105/8 c.ft	Rly freight from Yerraguntla to Kurgal R.S.	0-11-3		9-3-8	
		From Kurgal R.S. to Site 8 miles road	16-1-6	100 c.ft	2-1-10	
		Add 100% on Cartage	—	—	2-1-10	
	16⅔ C.ft	Concrete broken stone ¾" gauge Cement 1:3 (Based on S.I. No. 37 (a))	87-2-6	100 C.ft	14-8-5	Cost of Cement P.S.D 40-2-0 Godown 2-0-0 Charges loading & unloading 0-6-9 Rly freight 10-15-2 53-7-11 or 53-8-0
		96 c.ft broken stone 9-12-0/100 c.ft	= 9-5-9			
		48 c.ft. Sand 0-8-0/100 c.ft	= 0-3-10			
		16 ft. Conveyance 20-7-6/100 c.ft	= 3-4-5			
		96 c.ft Conveyance as above 8-3-3/100 c.ft	= 7-14-0			
		48 c.ft —do— 1-12-0/100 c.ft	= 0-13-5			
		Labour & Sundries as per S.I. No. 37 (a)	= 2-13-1	—	—	
		Add 125% on 9-5-9 + 0-3-10 + 2-13-1 + 12-6-8	= 15-8-4			
		Add 100% Cartage	= 12-15-10			
			87-2-6			
100 sq ft		Rabbit wire netting 6" mesh of not less than 14 S.W.G or expanded metal at 3" short way mesh ⅛" × ½" for reinforcement	0-4-0	Sq. ft	25-0-0	Allowed for estimate purposes only
	1050 Nos	Flat tiles	3-8-0	1000 Nos	3-10-10	(A)
		Conveyance 10 c.ft.c	1-7-7	"	1-8-9	
—	100 Sq ft	White washing 2 Coats	0-4-6	100 Sq ft	0-4-6	(B)
"		Pointing with Cement mortar 1:3	4-13-4			C.M. 1:3 33½ c.ft Cement @ 53-8-0/25 c.ft = 71-5-4
		½ C.ft. Cement mortar 1:3 @ 25-9-0				
		½ c.ft Conveyance of Sand 100 c.ft @ 1-12-0	0-6-1			100 c.ft Sand @ 0-8-0/c.ft = 0-8-0
		⅙ c.ft —do— of Cement @ 20-7-6/100 c.ft	0-0-2			
			0-0-7			
		Labour Charges as per S.I. No. 137/1-15-0				
		Add 125% on 1-15-0	= 2-6-9	Mixing charges		1-6-1 73-3-5
		Add 100% on Cartage	= 0-0-9			125% of 1-14- = 2-5-7 75-9-0
			4-13-4			
		Labour Charges as per S.I. No. 111 (c) including Sundries			8-0-11	
		Add 125% on A.B.C	= 12-0-3		15-0-4	
		Add 100% on 1-8-9		C.	1-8-9	
				Total	94-4-0	94-4-0

ESTIMATE FORM—Abstract.

Item number. (1)	Quantity. (2)	Description of work (3)	Rate. (4)	Per (5)	Amount. (6)	Total. (7)
			Rs.		Rs.	Rs.
		Flooring with Cuddapah Slabs 2" thick over bed of 4" lime Concrete and pointed with Cement mortar 1:3.				
	105 sq ft	Cuddapah Slabs 2" thick	7-0-0	100 sqft	7-5-7	
		Rly: Freight from yerraguntla to keppal Rs 0.11.3 as above	0.11.3	C.ft	12-4-11	
	105/6 C.ft	from Rly: Stn: to Site as above	16-1-1	100 c.ft	2-13-1	(C)
	33 1/3 C.ft	Concrete broken stone in lime mortar 1:2 as above	49-6-8	"	16-7-7	
	4 c.ft	Lime mortar 1:2	16-12-0	"	0-10-9	(A)
	4 c.ft	Conveyance of sand as above	1-12-0	100 c.ft	0-1-1	(D)
	2 c.ft	-do- lime as above	7-5-0	"	0-2-4	(E)
	100 sq.ft	Pointing with Cement mortar 1:3 as above	4-13-4	100 sq ft	4-13-4	
		Labour charges including Sundries as per S.I. No 88 (a)			3-15-2	(B)
		Add 125% on labour & materials A+B 24-9-11			5-12-5	
		Add 100% on Cartage C+D+E			3-0-6	
				Total	57-6-9	or 57-7-0
		Plastering with lime Mortar 2 coats including 2 stroke 2 rubbing 2 coats.				
		Rates as per S.I. No 124			3-14-0	
	7 1/2 C.ft	Conveyance of sand as above	1-12-0	100 c.ft	0-2-0	
	4 1/12 C.ft	-do- lime as above	7-5-0	"	0-4-9	
	100 sq ft	2 stroke 2 rubbing 2 Coats	0-4-6	100 sq ft	0-4-6	
		Add 125% on 4-2-6			5-3-2	
		Add 100% on Cartage			0-6-9	
				Total	10-3-2	10-3-0
		Pointing coursed rubble Masonary in Cement mortar 1:3				
	2 C.ft	Cement mortar 1:3 as above	75-9-0	100 c.ft	1-8-2	
	2 c.ft	Conveyance of sand as above	1-12-0	"	0-0-7	
	2/3 C.ft	-do- Cement as above	20-7-6		0-0-2	
		Labour charges as per S.I. No 137			1-15-0	
		Add 125% of 1-15-0			2-6-9	
		Add 100% of Cartage			0-2-9	
				Total	6-3-5	6-3-0
		Painting with Chocolate Paint 2 Coats				* Allowed for estimation purpose only
	5 3/4 lb	Chocolate paint R.M.	1-0-0	lb	5-12-0	
		Labour charges including Sundries as per S.I. No 166 (C)			1-4-0	
		Add 125% on 1-4-0			1-9-0	
				Total	8-9-0	8-9-0

ESTIMATE FORM—Abstract.

Item number. (1)	Quantity. (2)	Description of work (3)	Rate. (4)	Per (5)	Amount. (6)	Total. (7)
			Rs.		Rs.	Rs.
20		Teak wood ledged braced and planked doors	3'x6'			
	3·12 C.ft.	Teak wood	12-8-0	C.ft	39-0-0	
		Sundries including bold fast & wind appliances etc. S.I. No 198			3-2-2	
	18 Sq ft	Labour charges	0-3-3	1 Sq ft	3-10-6	
		Furniture as per S.I. No 198			2-8-0	
		Add 125% of 9-4-8			11-9-10	
		Add for Conveyance			2-0-1	
				Total	61-14-6	61-14-6
21		Roofing with Kangalore Tiles over ceiling Teak Reapers complete Standard Tile Rate including Tiles at Yalalawanka				
	150 Nos	Cost of Kangalore Tiles	140-0-0	1000 Nos	41-4-10	
	145	" " ceiling	140-0-0			
	295 Nos	Rly: freight from Yerangudla to Kuppal R.S.	34-10-0	"	10-4-5	
		From Rly: Stn: to site 8 miles road	6-0-0	"	1-12-4	⊗ Local rate
	110 R.ft	Teak Reapers 2" x 1"	10-0-0	100 R.ft	11-0-0	
	1 lb	French nail	0-2-0	lb	0-2-0	
	3 C.ft	Lime mortar 1:2	16-12-0	100 c.ft	0-8-1	
	3 C.ft	Conveyance of Sand	1-12-0	"	0-0-10	⊗
	1·5 C.ft	" lime as above	7-5-0		0-1-9	⊗
		Labour charges as per S.I. No 109			3-3-9	
		Add 100% on Conveyance ⊗			1-14-1	
		Add 125% on materials & labour			4-13-4	
				Total	75-2-3	75-3-0
22		Pointing Cut stone slabs in Cement mortar 1:3				
	1/3 C.ft	Cement mortar 1:3 as above	75-9-0	100 c.ft	0-4-0	
	1/3 C.ft	Conveyance of Sand	1-12-0	"	0-0-1	
	1/9 C.ft	do- Cement	20-7-6	"	0-0-4	
		Labour charges as per S.I. No 137			1-15-0	
		Add 100% on Conveyance			0-0-5	
		Add 125% on Labour & materials			2-6-9	
				Total	4-10-7	4-11-0
23		Country Wood (Vallamaddi) beams including fixing and Conveyance charges				
	1 C.f.	Cost of Vallamaddi	7-0-0	1 C.f.	7-0-0	
		Labour charges as per S.I. No 180			0-14-0	
		Add 125% on Labour			1-1-6	
		Add extra labour and special conveyance to site			1-0-6	
				Total	10-0-0	10-0-0

True copy of the data for Mantalum Hospital Estimate

20/2/17

ESTIMATE FORM—Abstract.

Item number. (1)	Quantity. (2)	Description of work (3)	Rate. (4)	Per (5)	Amount. (6)	Total. (7)
			Rs.		Rs.	Rs.
1	3500 c.ft.	Earth work Excavating foundation in gravelly Soil	13-13-0	1000 c.ft.	48	
2	12000 c.ft.	Concrete broken Stone 1½" guage in Lime Mortar 1:2	49-7-0	100 c.ft.	593	
3	10,300 c.ft.	Coursed rubble stone in Lime Mortar 1:2 2nd Sort in foundation, basement & Superstructure	62-3-0	"	6405	
	400 c.ft.	Cut Stone set in Lime Mortar —	188-15-0	"	756	
5	4700 c.ft.	Best Country Wood 'Nagla maddi' beams wrought & put in position including conveyance	10-0-0	c.ft.	470	
6	100 c.ft.	Best Country Wood 'Nagla maddi' wrought & put in position including conveyance	8-8-0	"	850	
7	10 Nos.	Teak wood doors 4'-0" x 8'-0" fully panelled inclusive of holdfasts wind appliances: exclusive of cost of furniture but including fixing in position	95-0-0	each	950	
7.(a)	10 sets	Furniture for doors	8-3-0	set	82	
8	17 Nos.	Teak wood windows 3'-0" x 4'-0" panelled inclusive of holdfasts, wind appliances and ¾" dia iron bars exclusive of cost of furniture but including fixing in position	60-00	each	1020	
8(a)	17 Sets	Furniture for Windows	6-6-0	each	108	
9	10 Nos.	Teak Wood Almirahs 2'-6" x 5'-0" with Panel Shutters including furniture, painting etc. complete and fixing in position	70-0-0	each	700	
10	6 Nos.	- Do - 3'-0" x 6'-0" — do.	90-00	"	540	
11	1450 sq.ft.	Flooring with Cuddapah Slabs 2" thick over a bed of 4" thick Lime Concrete and pointed with cement mortar	57-7-0	100 sq.ft.	833	
12	600 sq.ft.	Flooring with Cuddapah Slabs 2" thick and pointed with cement mortar 1:3	41-0-0	"	25	
13	2050 sq.ft.	Terrace Roofing with Cuddapah Slabs 1½" thick pointed with cement mortar 1:3 & full depth of slabs, 2" concrete hand broken stone ¾" guage in cement mortar 1:3, two courses of flat-tiles in cement mortar 1:3 and white washed 2 coats at bottom	94-4-0	"	1932	
14	5000 sq.ft.	Plastering with Lime Mortar 2 coats and white washed 2 coats	10-3-0	"	509	
				C. O.	15821	

ESTIMATE FORM—Abstract.

Item number. (1)	Quantity. (2)	Description of work (3)	Rate. (4)	Per (5)	Amount. (6)	Total. (7)
			Rs. a. p.		Rs.	Rs.
15.	3600 sq.ft.	Painting Coursed rubble masonry in cement mortar 1:3	6-3-0	100 sq. ft.	223	
16	2400 sq. ft.	Painting New Woodwork with Chocolate paint 2 coats over a Primary Coat	8-9-0	"	206	
17	L.S.	Fluctuation in rate for material and other unforseen works		L.S.	250	
		Total			16,500	16,500

Hillayya Nag. 20/2/47.
Divisional Engineer Highways
Bellary

Name of Taluk

Name of Work

ESTIMATE FORM--Detail Measurements.

Detail of work.	Number	Measurements in Feet.			Area or contents.	Total quantity of each description of work.
		Length	Breadth	Depth.		
(1)	(2)	(3)	(4)	(5)	(6)	(7)

Name of Taluk

Name of Work

ESTIMATE FORM--Detail Measurements.

Detail of work. (1)	Number (2)	Measurements in Feet. Length (3)	Breadth (4)	Depth. (5)	Area or contents. (6)	Total quantity of each description of work. (7)
			B.F		2730	
Parapet wall over two places	2	14.4		3-6	1008	
" " Passage	2	6-0"		3-6	42	
			Total		3780	
Deduct for ~~Doors~~ D						
Windows —	17	3-0		4-0	204	
Net quantity —					3576	or 3600 Sq ft.
(16) Painting new Wood Work with Chocolate paint — 2 Coats over a Priming Coat —						
Doors 'D'	10	4-0	2 1/4	8-0	720	
Windows 'W'	17	3-0	2 3/4	4-0	561	
Beams —	5	13-0		1-8"	108	
Joists in Rooms	1	658'-0		1-2"	768	
" Passage —	1	222'-0		1-0	222	
		Total			2379	or 2400 Sq ft.
(17) Fluctuation in rates for materials and other Unforseen Works.					—	Nil

Asst Engr Mad.
20/2/47.
Divisional Engr. Highways
Bellary

Name of Taluk

Name of Work

ESTIMATE FORM--Detail Measurements.

Detail of work. (1)	Number (2)	Measurements in Feet. Length (3)	Breadth (4)	Depth. (5)	Area or contents. (6)	Total quantity of each description of work. (7)
3) Terrace - roofing with cuddapah slabs 1½" thick pointed with cement mortar 1:3 to full depth of slabs 2" concrete 1½ gauge stones ¾" gauge in cement and mortar 1:3 two Courses of flat tiles set in Cement mortar 1:3 and white washed 2 coats at bottom						
Terrace over two blocks and passage	1	58-6	34-6		2018	
			Total		2018	or 2050 Sq ft.
14) Plastering with Lime mortar 2 Coats and white washed 2 coats						
Inside Preparation and Baby's bathing rooms	2	41'-0"		12'-0	984	
Septic & Asseptic labour rooms	2	50'-0"		12'-0"	1200	
Sterilizing room	1	40'-0"		12'-0"	480	
Store and Nurses rooms	2	38'-0"		12'-0"	912	
Septic & Asseptic Ward No 2	2	48-0"		12'-0"	1152	
Asseptic ward No 1	1	49'-0"		12'-0"	588	
Longitudinal Walls in passage	1	60'-0"		12'-0"	720	
		Total			6036	
Deduct for Doors 'D'	2x10	4-0		8-0	640	
Windows 'W'	1x17	3-0		4-0	204	
Almirahs 'S'	10	2'-6"		5-0	125	
" 'S'	6	3-0		6-0	108	
		Total deductions			1077	
Net quantity - 6036 - 1077 = 4959 or 5000 Sq ft.						
15) Pointing Coursed rubble measuring in cement mortar 1:3						
Exterior Basement around	1	192'-0		2'-6"	480	
Longitudinal Walls	2	60'-0"		12'-6"	1500	
Side Walls	2x2	15'-0"		12-6"	750	
				C.O	2730	

Name of Taluk

Name of Work

ESTIMATE FORM--Detail Measurements.

Detail of work.	Number	Measurements in Feet. Length	Breadth	Depth.	Area or contents.	Total quantity of each description of work.
(1)	(2)	(3)	(4)	(5)	(6)	(7)
9) Teak wood doors fully panelled inclusive of hold fasts and hind appliances exclusive of cost of furniture but including fixing in position of size		4-0	× 8-0		10 Nos.	10 Nos
a) Furniture for the above		———			10 Sets	10 Sets
5) Teak wood windows panelled inclusive of hold fasts and wind appliances 3/4" dr windows exclusive of cost of furniture but including fixing in position of size		3-0	× 4-0		17 Sets	17 Sets
a) Furniture for the above		———			17 Sets	17 Sets
9) Teak wood almyrahs with panelled shutters and furnitures complete including fixing in position of size		2-6	× 5-0			10 Nos
10) —— do —— do —— of size		3-0	× 6-0		———	6 Nos
11) Flooring with cuddapah slabs 2" thick over a bed of 4" thick lime Concrete and pointed with Cement mortar 1:3						
Preparation room and baby's bath rooms	2	8-0	11-6		184	
Septic and Aseptic bath rooms	2	12-6	11-6		288	
Sterilizing room	1	7-6	11-6		86	
Store and Nurses rooms	2	6-6	11-6		150	
Septic or Aseptic Ward No. 2	2	11-6	11-6		265	
Asepte Ward No. 1	1	12-0	11-6		138	
Passage	1	56-0	5-6		308	
		Total			1419	or 1450 Sq ft
12) Flooring with cuddapah slabs 2" thick and pointed with cement mortar 1:3 both						
Sills of doors	10	4-0	1-6		60	or 60 Sq ft

Name of Taluk

Name of Work

ESTIMATE FORM--Detail Measurements.

Detail of work. (1)	Number (2)	Measurements in Feet. Length (3)	Breadth (4)	Depth. (5)	Area or contents. (6)	Total quantity of each description of work. (7)
			B.F		1225	
Lintels over almirahs 5'	10	3'-6"	1'-6"	0'-6"	26	
	6	4'-0"	1'-6"	0'-6"	18	
Total Deductions					1269	
Net quantity. 11549 - 1269 =				1028.0	cft	10,300 C.ft
4) Cut Stone Work						
Lintels over Doors, Windows & Almirahs as per details in 3 above					133	
Cornice Work	1	192'-0"	1'-0"	0'-6"	96	
Coping over parapet	1	300'-0"	2'-0"	0'-3"	150	
Slabs over passage	2	8'-0"	1'-6"	0'-9"	18	
			Total		397 cft	400 C.ft
5) Best Rallamaddi beams wrought & put up including Conveyance.						
Beams	5	14'-0"	0'-8"	1'-0"	47 cft	47 C.ft
6) Best Rallamaddi wrought and put up including Conveyance						
Joists at 1'6" etc in preparing room	7	10'-0"				
" Septic Labour "	2×7	7'-3"				
" Sterilising	7	9'-6"				
" Aseptic Labour	2×7	7'-3"				
" Babies Bathing	7	10'-0"	0.2"	0.6"	68.0	
" Store Room	7	8'-6"				
" Septic Ward	2×7	6'-9"				
" Aseptic Ward No I	2×7	7'-0"				
" " No 2	2×7	6'-9"				
" Nurses Room	7	8'-6"				
" Passage	37	7'-6"	0.2"	0.5"	19.27	
Add Extra for fish plates		L.S.			12.73	
		Total			100	100 Cft

Name of Taluk (Maternity Ward)

Name of Work Constructing a Hospital Building at Ravutalq

ESTIMATE FORM--Detail Measurements.

Detail of work. (1)	Number (2)	Measurements in Feet. Length (3)	Breadth (4)	Depth. (5)	Area or contents. (6)	Total quantity of each description of work. (7)
1) Earth Work Excavating foundations in Gravelly soil —						
Main walls alround	1	186'-0	3'-0"	3'-0"	1674	
Longitudinal Walls	2	55'-6"	3'-0"	3'-0"	999	
Cross walls	8	10'-6"	3'-0"	3'-0"	756	
			Total		3429	or 35.00 C ft
2) Concrete hard broken stone 1½" gauge in lime mortar 1:2						
Main walls alround	1	186'-0	3'-0"	1'-0"	558	
Longitudinal Walls	2	55'-6"	3'-0"	1'-0"	333	
Cross walls	8	10'-6"	3'-0"	1'-0"	252	
Steps.	2	7'-0"	4'-6"	0'-6"	32	
			Total		1175	or 1200 C ft
3) Coursed rubble in lime mortar 1:2 2nd sort Foundations, Basement and Superstructure						
Main walls alround	1	186'-0	2'-0"	4'-6"	1674	
Longitudinal Walls	2	55'-6"	2'-0"	4'-6"	999	
Cross walls	8	11'-6"	2'-0"	4'-6"	828	
Steps	2	6'-0 × 5 Sq ft			60	
Superstructure Main Walls of two blocks	2	144'-4"	1'-6"	12'-6"	5400	
Cross walls	2×4	12'-0	1'-6"	12'-6"	1800	
Parapet Wall over two blocks	2	144'-0	1'-6"	1'-9"	756	
" " Passage	2	6'-0	1'-6"	1'-9"	32	
			Total		11549	
Deduct for Doors 'D'	10	4'-0	1'-6"	8'-0	480	
Windows 'W'	17	3'-0	1'-6"	4'-0	306	
Wall almirahs 'S'	10	2'-6"	1'-6"	5'-0	188	
" 'S'	6	3'-0"	1'-6"	6'-0"	162	
Lintels over Doors 'D'	10	5'-0	1'-6"	0'-6"	38	
" Windows W	17	4'-0"	1'-6"	0'-6"	51	
				C.O	1225	

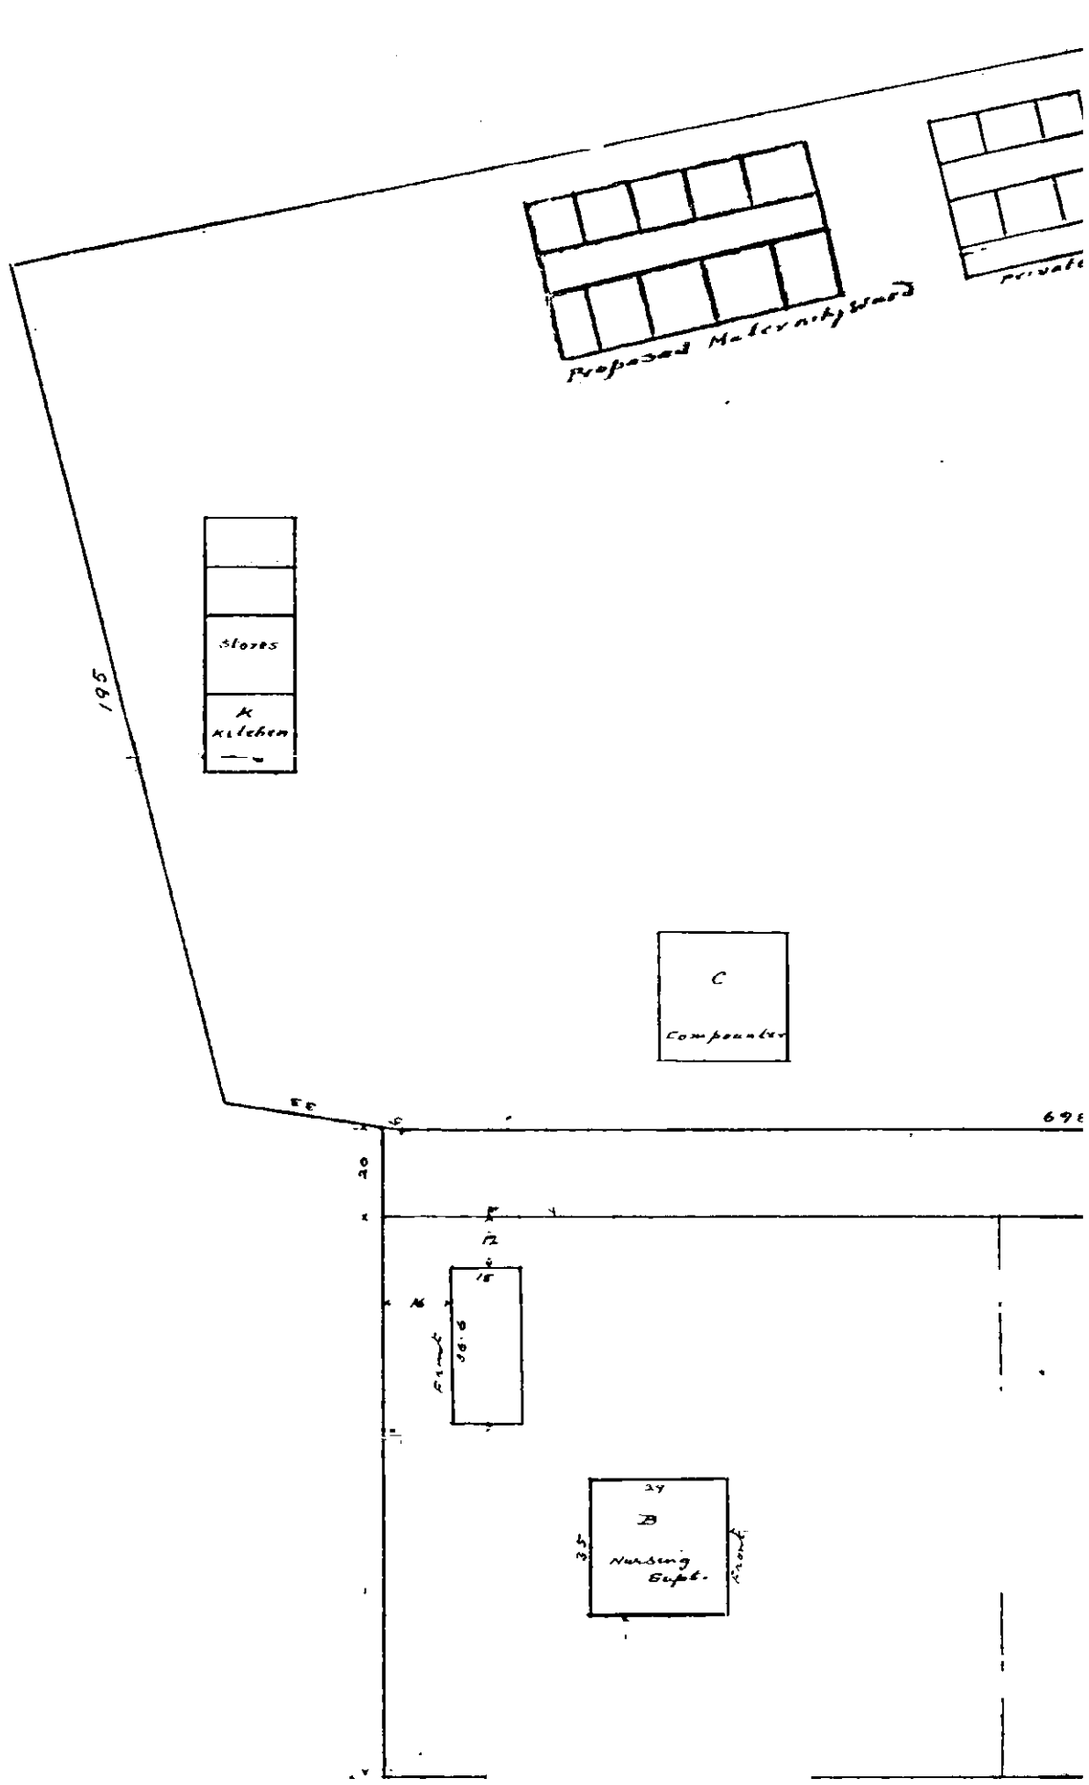
Proposed Maternity Ward
Stores
K
Kitchen
195
C
Compounder
20
15
38.6
35
Nursing Supt.

SITE PLAN London Mission

—KAVUTALAM - HOSPITAL—

(Admin Bg.)

Scale: 1" = 40'

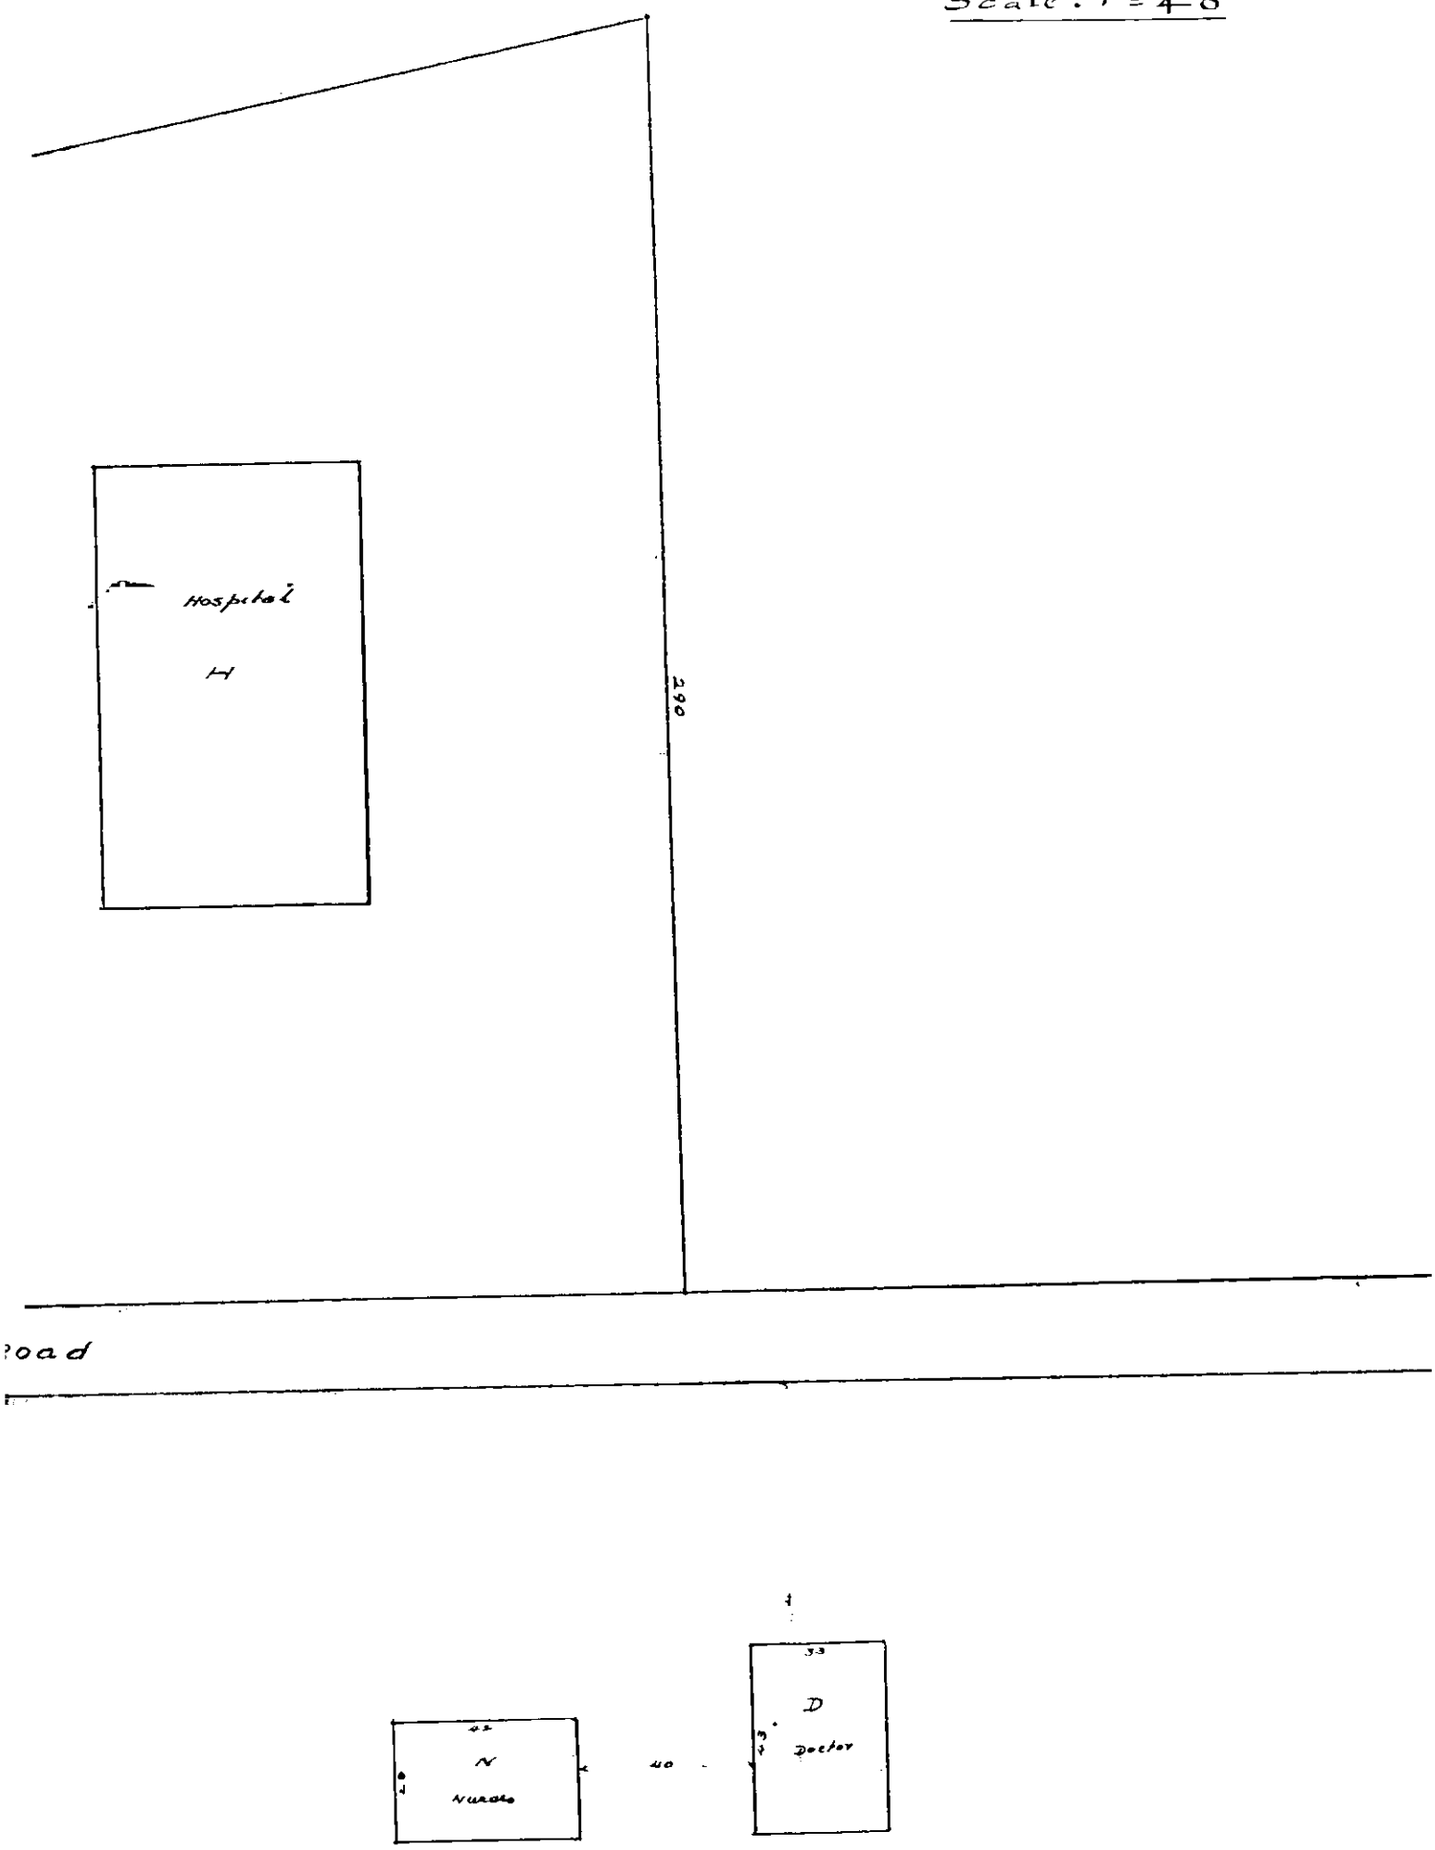

ESHG2 37

D.O. No. 1283 Genl/W – 3 CH–D/ 20 x W

(Dear Mr. [illegible])

Yours truly
[illegible]
Mrs.

Subj:- Grants – Buildings – Lawson Mission Hospital, Bellary.

Ref:- Ref. Your D.O. no nil dated 1.10.07

I have to inform you that the Director has agreed to have a talk with you in his room at 12.30 P.M. on Wednesday the 29th instant.

Yours

[illegible]
18 x W

[illegible]
20/10/07

To
Dr. R. Swaminarayana Rao M.C.,
Lascar Villa
Dr. Edwards Ellis Rd,
Mylapore M.

1801 lw/90.4.

Sub: Grant - Buildings - Private Medical Institution - London Mission, Bellary - Construction of a Maternity Ward at Kowtalam - Half grant of Rs. 8,250/- Sanctioned.

Ref: From the S.G. No. 14259-10.B.47 dated 29.9.47.
,, 14259-11-B-47 dated 10.10.47

Order: 1278 P.H., Dated 20-11-47.
MS

The Government sanction the payment to the London Mission, Bellary, of a half grant not exceedir Rs. 8,250/- (Rupees eight thousand two hundred and fifty only) towards the cost of a new maternity ward in the Mission Hospital at Kowtalam, which has been already completed.

2. The payment of the grant will be subject to the following conditions:-

(i) the grant will be disbursed by the Surgeon General subject to the inspection of the buildings by the Executive Engineer and a report that the buildings have been satisfactorily constructed;

(ii) the buildings shall be used solely for the purposes for which they are now intended;

(iii) the authorities of the institution shall refund the grant or a portion of it, as specified below, if the buildings in respect of which the grant is made, ceases to be used for ~~the~~ medical purposes approved by Government at any time within a period of 30 years from the date of payment of the grant. The amount to be refunded shall bear the sar ratio to the total grant as the unexpired portion of the thirty years for which the buildings are secured against diversion, bears to the total period. If the authorities fail to make such refund, the Government may recover the amount by such means as

they consider suitable;

(iv) the authorities who receive the grant shall execute a stamped and registered memorandum of the deposit of title deeds relating to the ~~xxxxx~~ buildings embodying the above conditions;

(v) the Surgeon General will scrutinise the title deeds of the property and other particulars before authorising payment of the grant at the time of execution of the memorandum of the deposit of title deeds.

3. The expenditure should be debited to "38. Medical - B. Hospitals and dispensaries - G. Grants to Private medical institutions - Ordinary areas - 3. Buildings and equipment grants - Voted - Buildings"

To the S.G.

the London Mission, Bellary thro' the S.G.

the ~~A.G.~~ thro Fin Dep.

~~the~~ Fin Dept.

Stock File -1

Spare copies -2

In.P.No.55 Bud/48. Office of the Surgeon-General with the Government of Madras, Madras 6, Dated 31st May 1948.

From

Colonel S.L.Bhatia, CIE.MC.MA.MD.(CANTAB) FRCP(LOND) FRS(E)., Surgeon-General with the Government of Madras, Madras.6.

To

The Secretary to Government,
Education and Public Health Department, Madras.

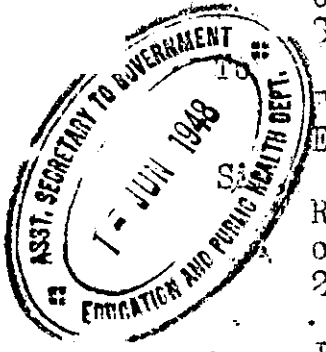

Sir,

Ref: Grant-Buildings-London Mission-Bellary-Construction of a Maternity ward at Kavalam-G.O.No.Ms1278 P.H., dated 20-4-48.

In para 2 (i) of the G.O cited above I have been authorised to disburse the grant on production of a report from the Executive Engineer that the buildings have been satisfactorily constructed after inspection of the same by him. With reference to paras 2 (iv) and (v), the authorities have to execute a supplemental mortgage deed and they have also to be scrutinised by me before authorising the payment of the grant. It may take some time to complete the above conditions.

40261

2. In this connection a reference is solicited to G.O.No. 5621 P.H., dated 11-5-1943 permitting part payment of grants.

p.t.

It may kindly be stated whether in the light of this order a part payment up to 80% of the grant sanctioned, may be disbursed to the management and the balance after the agreement has been executed. A reference in this connection is invited to Government Memo. No.207052/47-2 P.I dated 18-3-47 on a similar case.

Your obedient servant,

V. Ramaswami

for Surgeon-General with the Government of Madras.

RS/30.5

Edn H Dept
Gr

Grant. Buildings. London Mission - Bellary - Construction of a Maternity ward at Kurtalam - Half grant. From the S.G. Im. P. No. 55 Bud/48 D/31-5-48. Read again G.O. No. 1278 PH D/20-4-48

Memo 40261/48-2 Gr2 PH D/29-6-48.

The S. G. is informed that a part payment upto to 80% based on actual expenditure of the grant due may be disbursed to the management of London Mission, Bellary and the balance after the agreement deed is executed.

To
The S. G.
The A.G. Thro. the A.G.

I.S.O. 17/7/48

per I.S.O. 17.6.48

V. 6.48

Gr 13
30/6
Journal pp 1-2 Gr
JRR 29/6/48

RFQ REQUISITION LOT

(B)

Date.

" not figure
Item No.

Date

Signature

Designation

ACKNOWLEDGMENT

Received the abovementioned records except items

Designation

REQUISITION FOR RECORDS.

Madras Government Secretariat Department Section Record Issue No.

Date

To
The Curator, Madras Record Office, Egmore.
The Superintendent, Central Record Branch, Fort St. George.
The Librarian, Secretariat Library, Fort St. George.

The following records are required :—

Serial number. (1)	Nature of record (G.O. (Ordinary or Ms.), Memorandum, Endorsement, Demi-official, Lodged papers, etc.). (2)	Number. (3)	Department. (4)	Date. (5)	Whether Original (O), Sp. copy (S.C.), or Sp. copy with Notes (S.C.N.) (6)	Purpose. Current number. (7)	Purpose. Year. (8)	If not furnished, reasons. (9)

Date

Signature
Designation

ACKNOWLEDGMENT.

Signature
Designation

Received the abovementioned records except items

Encl 2

Sub:- Grant - Buildings - Maternity ward, — London Mission Hospl. Bellary - Half grant

Ref:- — From the SG no. 14259-10 PH/47 dt 29-9-47

Dno. 74283 E2/47

29-3 cf (G)

In Go no. 1264 PH dated 8.4.42 the Govt sanctioned a half grant of Rs 15,200/- to the London Mission, Bellary, towards the construction of a Hospital at Kowtalam. The authorities of the institution drew till last year only a sum of Rs 1320/- They requested that the balance of grant of Rs 13,880/- might be increased by 100% (ie to Rs 27,760/-) in view of the increased cost of transport, labour and materials, since the grant was originally sanctioned. The CE who scrutinised the revised plans and estimates estimated the cost of the scheme at Rs 61,900. On this basis, the balance of the half grant payable by Govt worked out to Rs 29,630/- The request of the Mission authorities for the balance of half grant of Rs 27,760/- which was comparatively less than the CE's estimate was undoubtedly advantageous to Govt. But in view of the financial position of Govt, the request of the authorities was turned down in Go no 1112 PH dated 24.4.47. This now reported that the buildings have been completed and that the half grant of Rs 15,200/- sanctioned in Go no 1264 PH dt 8.4.42 has also been fully drawn by the management.

1 ans 3 p 12 cf (L)

30950/-
13320
29,630

P 15-6 cf (L)

2 14-0 cf (L)

2. In this letter at page 5 cf, the SG now ~~report~~ requests sanction of Govt for the payment of a half grant of Rs 8250/- towards the cost of extensions to the new Hospital buildings for the provision of a maternity ward. The buildings, it is stated, have been completed at an estimated cost of Rs 16,500/- It is stated that the Mission authorities undertook the construction of the new extensions only on the strength of the assurance given by the previous

Surgeon General (Major General + J.P. Hubback) : JSG :
that he would get them a half grant from
Govt for the purpose. The SG therefore recommends
that the request for a half grant of Rs 8250/-
may be considered as a Part II scheme for 48-49
This submitted that the plans & estimates as
approved by the Superintending Engineer have
not been sent by the SG. Before considering the
request it seems necessary to get the plans &
estimates as approved by the S.E. The SG may
thereon be requested to submit very urgently
the plans & estimates so as to enable the scheme
being finished through as a Part II for 48-49
~~subject to orders a draft memo is submitted for~~
~~approval~~ The correspondent of the Mission
states in his letter at ps 9 that he has
approached the late L.G. with plans and
estimates for a maternity ward in the
Mission hospital at Chikkaballapur. It
may perhaps be ~~not~~ got clarified whether the
maternity ward for which a grant is asked for
has been constructed in the hospital at
Chikkaballapur or in the new hospital at
Kavalalam.

Subject to approval, a draft memo
is put up.

IRK
4.10.48

Since applications for grants
after the buildings are completed
As in this case, however, the Mission
Authorities have proceeded with
the construction on the strength of an
assurance given by the late L.G.
it is the case with them to be treated
as a special one when the plans and
estimates are received.

6.10.48

7/10/48

Dampr:
He states that they will be sent to Govt on receipt from our Dept.

He may also be requested to clarify whether the ward of this Correspondent regarding

p 7-8 cf. [Issued as Memo no. 74283 G2/47-26 H dt 7.10.47]
p 7 cf

From Sri R. Suryanarayana Rao. letter dt 1.10.47

Extract of G.S.'s remarks on p 2 of the Routine file.

p 2 Rt file. "There was a letter from Mr Suryanarayana Rao, MLA, about this recently. Please put it up"

C.O.C
7.10.47.

p 9 cf With reference to the remarks of G.S. extracted above, attention is solicited to Sri R. Suryanarayana Rao's letter since added at page 9 cf. He desires that a day may be fixed for an interview with H.M.(PH) so that he may present his case before him. It seems he wants to press for a reconsideration of the orders in G.O. no. 1112 G.H. dt 2.4.47 for the payment of an increased grant in respect of the hospital at Kovvalam, besides requesting for a help grant for the maternity ward (which is under consideration in this file). It is for orders whether this request for an interview may be complied with and if so the date and time for the interview may be kindly indicated.

(L) H.M. may perhaps see Mr Suryanarayana Rao. He has given Secn no a slip that any day after 15/10 will suit him. A day & time may please be fixed for the interview. After that, a note will be put up for H.M.'s perusal & thereafter a file put up for Orders.

11/10/47

10/10

11.10.47

11/10/47

12-30 noon on the 29th inst may be fixed. HM (PH) 15/10

16 OCT 1947

SECRETARY, EDN. AND P. H. GOVERNMENT OF MADRAS

16-OCT-47

p 13 cf From the SG Ag. 14259-II B/47 dt 2/10 [rout]

With reference to the memo on pages 7-8 cf the SG has now reported that the

Part A. G.A. M.E. III

newly constructed Maternity ward is attached to the hospital buildings at Kavulalam - Also please see in this connection the plans of the hospital buildings on page 33-C. The buildings have been completed are said to under the Supervision of the Divisional Engineer, Highways Bellary, who is competent to countersign & furnish the necessary Certificate of completion of the buildings prescribed in para 9.7.8(iii) of the Civil Medl. Code. The request for a half grant of Rs 8,250/- may therefore be strongly supported on this Deptt, as already recommended on page 2 above. The proposal does not appear to satisfy any of the criteria laid down for Partly Schemes. In the circumstances however stated at 'A' on page 2 above, Finance may be requested to treat this as a special case, as a Partly Scheme for 1946-47.

2. With reference to H.M (O.H.)'s minute on page 3 above, a draft D.O. to Sri R Swamy Narayana Rao, is submitted for approval.

Spl

(Finance may be requested to return this file before 28.x.47 for this department on 29.x.47 from where Sri Swamy Narayana Rao).

Fin (B.E. III)

Please see the notes from p 1 above. E & P.H. propose that a half grant of Rs 8250 may be sanctioned to the Management of the London Mission, Bellary towards the cost of a maternity ward attached to the hospital buildings at Kavulalam and that the proposal may be treated as a

Issued as DO No 74283-G2/47-4 dt 20.x.47

Finance

PH No 74283-G2/47-4

ADDITIONAL DEPUTY SECRETARY 63139 21 OCT 1947 FINANCE DEPARTMENT

Received 21.X.47

Part II scheme for 1948-9.

'A's. p.S.G.E

2. The construction of the ward has already been completed. As pointed out by the E.+P.H. Asst. Secretary on p 2 above, it is not usual to consider applications for grant after the buildings are completed. The proposal does not also satisfy the criterion laid down by the Govt. for the selection of Part II schemes for 1948-9. Finance must, therefore, oppose it.

If E.+P.H wish to press their proposal, they may be requested to obtain orders in circulation including H.H (Fin) as to whether it will be considered as a Part II scheme for 1948-9 or not.

84839

E.P.H.

Fin. B.E. III U.O. 63139 27.10.47.

8/P.H. 62.

In G.O. No. 1264 P.H. dated 8.4.42, the Govt sanctioned a half grant of Rs 15,200/- to the London Mission Bellary towards the construction of a Hospital at Kowtalam. The authorities of the institution drew till last year, only a sum of Rs. 1,320/- They requested that the balance of grant of Rs 13,880/- might be increased by 100% (ie to Rs 27,760/-) in view of the increases Cost of transport, Labour and materials, since the grant was originally sanctioned. The C.E. who scrutinised the revised plans and estimates, estimated the cost of the scheme at Rs. 61,900/- On this basis, the balance of the half grant payable by Govt worked out to Rs 29,630/- (Marks Rs. 30,950/- minus Rs. 1,320). The request of the Mission authorities for the balance of half grant of Rs 27,760/- which was comparatively less than the Chief Engineer's estimate, was no doubt advantageous to Govt. But in view of the financial position of Govt, the request of the authorities was turned

down in GO no. 1112 J.H. D/ 2.4.47. ..... pp 19-20 cf
reported. that the buildings have been completed
during 1948 the half grant of Rs 15,200/- sanctioned
in GO no. 1264 SH D/ 8.4.48 has also been drawn
& spent by the management. It appears
the Correspondents of the Mission submitted a
representation to the SA in his letter d/ 8.9.49
reiterating his request for increasing the
building grant sanctioned in 1948 by 100%.
The SA however informed him that no
useful purpose will be served by pursuing
up the matter again to Govt as they had
already refused to comply with the request
of the authorities.

2. In his letter at page 5 cf. the SA now
requests sanction of Govt for the payment of
a half grant of Rs 8,250/- towards the cost of
extensions to the new Hospital buildings at
Kovilakam for the provision of a maternity
ward. The buildings, it is stated, have
since been completed at an estimated cost
of Rs 16,500/-. It is reported that the Mission
authorities undertook the construction of the
new extensions only on
the strength of the assurance given by the
previous Surgeon General (Major General
J.P. Inbaraj), that he would get them a half
grant from Govt for the purpose. The SA
therefore recommends that the request for a
half grant of Rs 8250/- may be considered
as a Part II Scheme for 1948-49. In the circum-
stances stated by the SA, this Dept has recommended in para 4 above
that the proposal may be treated as a Part II
Scheme as a special case, though it does not
satisfy any of the criteria laid down for such Compare above
schemes. Finance however advise against the
proposal. As the Maternity ward is reported to para 5 above
have been constructed only on the strength of

p.5 of assurance given by the previous SA that he would get a half grant from Govt; this for orders whether this Dept may press for sanction of this half grant of Rs 8250/- applied for. Orders may be obtained in consultation with HM (PH) & HM (Finance)

2
28/10/47
JRR
28/10/47

There are 2 proposals involved in this file.

[The notes in paras 1 & 2 above are submitted for HM (PH)'s personal ear this morning as arranged on 29th at 12.30 with Mr R. Suryanarayana Rao who wishes to press this cases contained in these two paras. ~~referred to~~]

2
28/10/47
JRR
28/10/47

(1) A half grant towards the cost of Construction of the main hospital building at Kurnool

And (2) A half grant towards the cost of Construction of a new ward attached to the main hospital building.

Para 1 of his office note above deals with proposal (1).

Sri Suryanarayana Rao, M.L.A. interviewing HM (PH) on his Application and his interview has been fixed up for tomorrow 12.30 P.M.

Para 2 of his office note asks whether the proposal (2) this for orders. Also go forward as a Part II Scheme for Govt.

HM
29.10.47

(L) Perm.

Copy at (K)

Re (1), I think the sorts ~~orders~~ noted in (L) below may be reconsidered and ~~a~~ a total ½ grant of Rs 27/60/- made. ~~Please see~~ Please see 3-6 of (L) below.

Re (2), the proposal may go forward as a Part II scheme.

0033
29/X

28/10/47

HM (PH)
HM (Finance)

The London Mission Hospital at Kowtalam is meeting the needs of the rural areas and is well spoken of by the local people. The Mission's request for increasing the balance of the half grant by 100% on account of the increased cost of transport, labour and materials is reasonable. The amount asked for by them is less than half the cost of construction of the hospital as estimated by the P.W.D. It is a pity it was not sanctioned when it was first asked for. The orders in flag (L) may be revised and an additional sum of Rs.13,880/- may be sanctioned towards the half grant for the construction of the hospital. The other request of the Mission for a half grant of Rs.8,250/- for the construction of a maternity ward, may be taken as a Part II scheme for 1948-49.

30/10/47

On our building estimates are put over 30% more for private buildings. The first request is quite reasonable and justifiable. The second may be considered as Part 2.

B.G.A 31.X

Please see the orders in circulation above. Regarding request no (1) copies extracts have been taken for separate action.

As regards request no (2), a draft Govt note is submitted for approval. Finance may see for acceptance.

31 OCT 1947 GOVERNMENT OF MADRAS

31 AUG 1947

2/11/47

5/11/47 Finance

Fin. No. 74283 E2/47-5

The draft note may be accepted.

8.11.47

8-NOV 1947 EDUCATION AND PUBLIC HEALTH DEPARTMENT

8.11.47

66602 NOV 1947 ASST. SECRETARY TO GOVERNMENT FINANCE DEPARTMENT

E.D.H.

Fin. B.E.(1) U.O.-1 74283

The draft Part II note may now be sent to press for printing. ~~Copies have to be supplied to Parliament~~. 40 copies ~~may be got printed~~.

13.11.47

15

18.11.47

18.11.47

17.11.47

Part II Scheme for 1948-49

[Subject :- Building grant to the London Mission Hospital, Bellary for the construction of a Maternity ward at Kowtalam.]

Summary

Head of account	Item of expr.	Estimate Cost Non-recurring.	Cost in 1948-49 Non-recurring
58. Medical - b Hospitals and dispensaries - G Grants to Private Medical Institutions / 3 Buildings and equipment grant	Construction of a Maternity ward at Kowtalam in the hospl. buildgs at Kowtalam	~~8,300~~ Rs ~~8,250~~	~~8,300~~ Rs ~~8,250~~
I Ordinary annual - Voted	Deduct - Probable savings (25%)		~~200~~ ~~50~~
	Total	8,300 Rs 8,250	8,300 ~~8,250~~ ~~8,250~~

Explanatory note.

Art 578 of the Civil Medl. Code ~~not found up~~

Grants to private bodies for medical buildings are usually made to the extent of one half of the total cost of the works approved by the Government. The grant is disbursed on the post-payment system on production of a completion certificate in the prescribed form signed by the Engineer or Architect in charge of the work to the effect that the buildings have been constructed generally in accordance with the approved plans and estimates and that they have been completed satisfactorily.

~~P 5 C~~ 2. The Correspondent of the London Mission, Bellary ~~Hospital, Buildings at Kowtalam~~ requests ~~has made application~~ for a half grant of Rs 8,250/- towards the construction of a Maternity ward

Mission

in the Hospital ~~building~~ at Kanakalamu. The ward is ~~building has already~~ been completed already at an p s c
estimated cost of Rs ~~16,250~~ 16,500/- The Correspondent states
that the Mission authorities undertook the construction p s c of
of the Maternity ward only, on the strength of the
assurance given by the previous SG (Major
General J P Hubback) that he would get them a
half grant from Govt for the purpose. The (present SG p s c
~~therefore~~ recommends the request of the Mission
~~authorities for a half grant of Rs 8,250/-~~ in the
circumstances, ~~it is proposed to sanction the~~ Please see correspondence
~~half grant~~. (this Dept suggests ~~recommended~~ that on or about the 8th
necessary provision may be made in the
annual estimate of expenditure for 1948-49 for the
sanctioning a half grant of Rs 8250/- or 8,300 roundly
to the London Mission, Bellary.

2
2nd W
3
JPR
3.11.47

Secy

Explanatory Note.

Grants to private bodies for medical buildings are usually made to the extent of one-half of the total cost of the works approved by the Government. The grant is disbursed on the post-payment system on production of a completion certificate in the prescribed form signed by the Engineer or Architect in charge of the work to the effect that the buildings have been constructed generally in accordance with the approved plans and estimates and that they have been completed satisfactorily.

2. The Correspondent of the London Mission, Bellary, requests a half grant of Rs. 8,250 towards the construction of a maternity ward in the Mission Hospital, at Kowtalam. The ward is said to have been completed already at an estimated cost of Rs. 16,500. The Correspondent states that the Mission authorities undertook the construction of the ward only on the strength of the assurance given by the previous Surgeon-General (Major-General J. P. Huban) that he would get them a half grant from Government for the purpose. The present Surgeon-General recommends the request of the Mission. In the circumstances, this Department suggests that necessary provision may be made in the annual estimate of expenditure for 1948-9 for the payment of a half grant of Rs. 8,250 or Rs. 8,300 roundly to the London Mission, Bellary.

C. O. Cooper—19-11-47.

EDUCATION AND PUBLIC HEALTH DEPARTMENTS.

PART II SCHEME FOR 1948–9.

[SUBJECT.—*Building grant to the London Mission Hospital, Bellary, for the construction of a maternity ward at Kowtalam.*]

Summary.

Head of account.	Item of expenditure.	Ultimate cost.	Cost in 1948–9.
		Rs.	Rs.
38. Medical—b. Hospitals and Dispensaries—G. Grants to Private Medical Institutions—Ordinary Areas—3. Buildings and Equipment Grants—Voted.	Construction of a maternity ward in the hospital buildings at Kowtalam.	8,300	8,300
	Total	8,300	8,300

Necessary provision has been included in the Budget for 1948-49 towards the payment of a half grant of Rs. 8,250/- to the London Mission, Bellary for the construction of a maternity ward in the Mission Hospitad at Kowtalam. The Annual Estimate of Expenditure under Demand XVI- 38.Medical has since been voted by the Legislature. The proposal in this file for the payment of a half grant may therefore now be sanctioned. A draft order is submitted for approval. Finance may see for acceptance before issue.

7468
7.4.48

8.4.48

~~77023~~
74283 G2 147-5
12.4.48

Finance.

SECRETARY TO GOVERNOR
12 APR 1948
28943
FINANCE DEPARTMENT

Fin (Exp A)

Please see the EPH. note above. The draft order may be accepted

[Provision has been made in the Budget for 1948-9 - please see item 132 mp 149 of the Budget Memorandum.]

28943 EA/48/1
14.4.48

HA
13.4.48

14/4/48 SPPH

EPH G2.

ASSISTANT SECRETARY TO GOVERNOR
15 APR 1948
27570
EDUCATION AND PUBLIC HEALTH DEPT.

The draft order may now issue

16.4.48

E & P H Dept-
G2.

Grant- Buildings- London Mission Bellary- Construction of a maternity ward at Kowtalam - part payment- of grant-.

P/1-2 cf. From the S.G. In P. No. 55 Bud/48 dated 31-5-48.

Please see the letter from the S.G. at- page 1-2 cf. In G.O. No. 1278 P H dated 20-4-48 Sanction was accorded to the payment- to the London Mission Bellary of a half grant not- exceeding Rs 8,250 towards the Cost- of a new maternity ward in the Mission Hospital at Kowtalam.- The ward was already completed at- the time of the Sanction of the grant.. The payment- of the grant- was subject- to the usual Conditions ~~specified~~ specified in para 2 of the G.O. As it would take some time before the Supplemental mortgage deeds are executed by the authorities and Scrutinised by the S.G., the S.G ~~recommends that~~ recommend- payment- Upto wishes to know if a part-payment- upto 80% of the grant- Sanctioned may be disbursed to the authorities now- In this connection attention is invited to orders in Memo no 20705 G2/47-2 P H dated 18.3.47 in a Similar Case. There does not- appear to be any objection in permitting the S.G. to make a part payment- upto 80% of the

(V/9 - 775 PH 11.3.47)

grant. Subject to orders a draft memo is submitted for approval. Fin may see before issue

15 Aug

JRR
15-8-48

17/8/48

Fin (Exp. A)

Please see the notes on pp 1-2 above.

The Draft memo below may be accepted.

23.6.48 Subject to the slight addition indicated in pencil

28.6.48

Exp A

Exp A Memo No.
40261/48-1 Sec A
21-6-48

ADDITIONAL DEPUTY SECRETARY
45911
22 JUN 1948
FINANCE DEPARTMENT

Fin (A) 45911 EA-1
23.6.48

ASSISTANT SECRETARY TO
46828
26 JUN 1948
EDUCATION AND PUBLIC HEALTH DEPARTMENTS

Exp A
Sec

Please see the notes of Fin above. The draft memo below may issue as amended by Fin

26/6/48

JRR
28/6/48

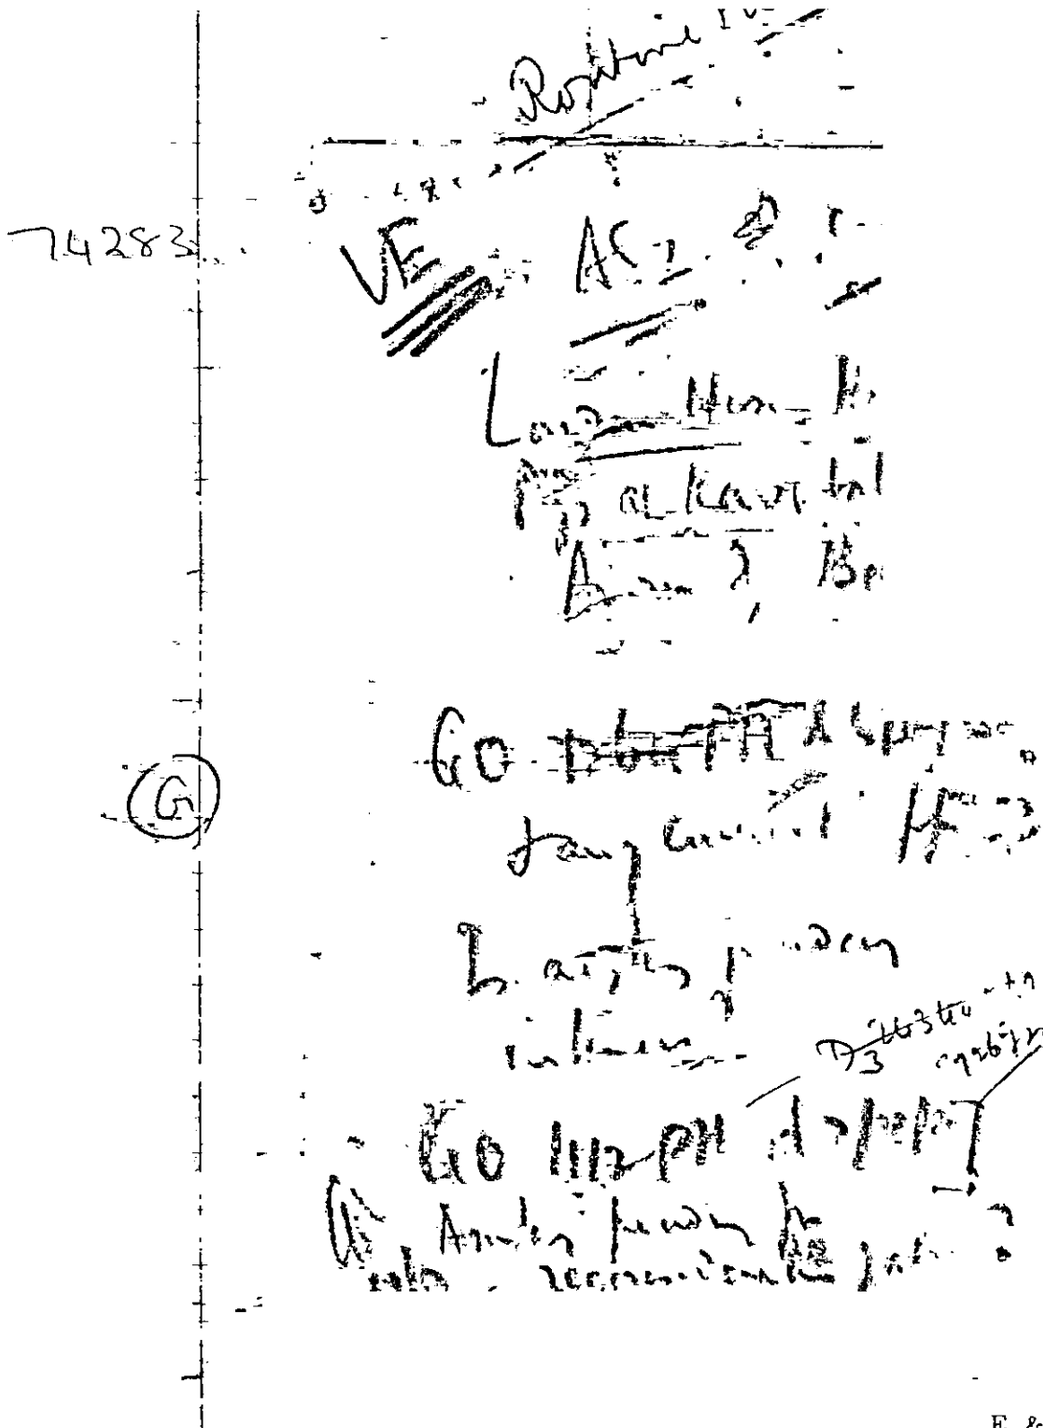

G.O. No. 1264 P.H. dated 8-4-42 has been called for from M.R.O. Chittoor. G.O. No, 1112 P.H. dated 2-4-47 is put up at flag (L).

In G.O No. 1264 P.H. dated 8-4-42 the Govt. sanctioned a half grant of Rs. 15,200 to the London Mission, Bellary, towards the construction of a hospital at Kowtalam. The authorities of the institution drew only Rs. 1,320 till last year. They represented that the balance grant of Rs. 13,880 might be increased by 100% in view of the increased cost of transport labour and materials since the grant was originally sanctioned. The C.E. who scrutinised the plans and estimates stated that the cost of the scheme would be Rs. 61,900/- and that the balance grant payable by Govt. on a half grant basis worked out to Rs. 29,630/- In The request of the

Mission authorities for a half grant of Rs. 27,760 which was comparatively less than the C.E's estimate, was no doubt advantageous to Govt. But in view of the financial position of Govt. the request of the authorities was turned down in G.O. No 1112 P.H. dated 2-4-47. No further papers have so far been received for a reconsideration of the above orders.

15.9.47

Any reply to reminder is pending in SG's office ? If so, when it will be called for ?

17/9/47

A draft memo is submitted for approval.

17.9.47

Issued as memo dated 24.9

From the SA a post copy of memo dated 26.9.47

With ref. to Joint Sec's query note above please see the SA's reply at pp 3-4 of the SA states that an application for a reconsideration of the orders in the GO at (L) was received in this office in Sept 47 and that in view of the orders of Govt at (L), he has informed the authorities that no useful purpose will be served by addressing the Govt. The SA further adds that the grant of Rs. 15,200/- originally sanctioned has since been drawn by the authorities in full.

Memo to be issued rejecting the request in the letter from Mr Suryanarayana Rao MLA dated 11/9/47

7/9/47

2. In this letter at pages 1-2 of the SA has now submitted proposals for the payment of a third grant of Rs 8250/- towards extensions to the Women's Hospital Buildings at Kurnool. The requests being dealt with in the main note.

29.9.47

30.9.47